



Position switch with spring rod RF 96 TK SW915B-NET Article no.: on request


Product features

- sWave.NET® wireless technology
- Thermoplastic enclosure
- Mounting details to EN 50047
- No wiring and cable laying required
- Power supply by Lithium battery (replaceable)
- Configurable online via wireless interface
- Actuator: Spring rod with plastic tip TK

Notes

- The battery must be ordered separately.

Dimensions

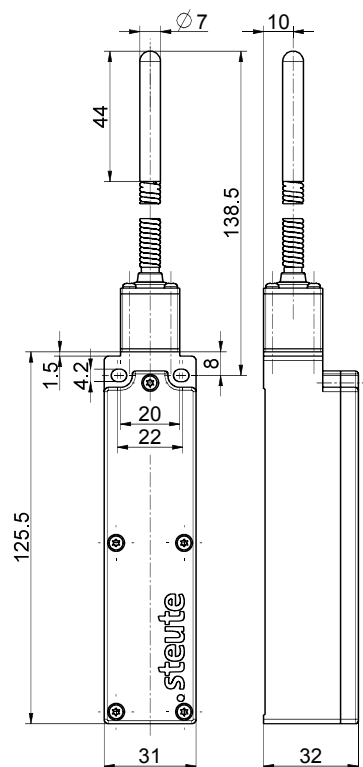

General technical data

Applied standards

EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 301 489-3, EN 300 220-2

Enclosure

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

Tightening torque

M4 enclosure mounting screws: max 1.2 Nm
M2.5 cover screws: approx. 0.45 Nm

Degree of protection

IP67 (IEC/EN 60529)

Ambient temperature

-20 °C ... +65 °C

Telegram rate

max. 12000 telegrams with repetitions/h

Mechanical life

> 1 million operations

Actuating time

min. 80 ms

Note

transmission of battery voltage and switching condition

Wireless technology

General

Frequency

914.2 MHz (USA, Canada)

Data rate

62.5 kbps

Channel bandwidth

500 kHz

Modulation type

CSS

Errors and omissions excepted.



Position switch with spring rod
RF 96 TK SW915B-NET
Article no.: on request

Wireless technology (contd.)

Protocol
sWave.NET®

Transmission power
< 25 mW

Wireless approvals
USA: FCC - VPYLBAA0QB1SJ
Canada: IC - 772C-LBAA0QB1SJ

Function

Wireless range
max. 450 m outdoors, max. 40 m indoors

Voltage supply

Voltage source
lithium battery Tadiran TL-5920 (replaceable)

System
Li/SOCl₂

Nominal voltage
3.6 V

Nominal capacity
8.5 Ah

Alternative voltage supply

Voltage source
lithium battery Tadiran SL-2770 (C), replaceable

System
Li/SOCl₂

Nominal voltage
3.6 V

Nominal capacity
8.5 Ah

Battery life
depending on the switching frequency, at 6x/minute: > 10 years