



Command device with 1 push button RF BF 74 RT SW917-NET Material no.: 1339314


Product features

- Thermoplastic enclosure
- sWave.NET® wireless technology
- No wiring and pipe laying required
- Configurable online via wireless interface
- Power supply by Lithium battery (replaceable)
- Actuator: Push button RT
- Actuator made of plastic

Notes

- The battery must be ordered separately

Dimensions

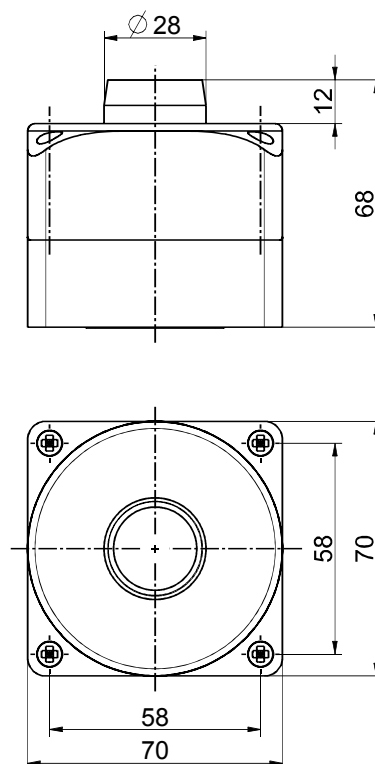

General technical data

Applied standards

EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 61000-4-2, EN 301 489-1, EN 301 489-3, EN 300 220-1, EN 300 220-2

Enclosure

polycarbonate

Tightening torque

cover screws: approx. 1.6 Nm

Degree of protection

IP65 (IEC/EN 60529)

Ambient temperature

-20 °C ... +65 °C

Operation cycles

max. 12000 telegrams with repetitions/h

Mechanical life

800 000 operations

Actuating time

min. 80 ms

Note

transmission of battery voltage and switching condition

Wireless approvals

Brazil: ANATEL 04172-18-06718

Wireless technology

Protocol

sWave.NET®

Frequency

917 MHz (Brazil)

Transmission power

< 25 mW

Data rate

66 kbps

Errors and omissions excepted.



Command device with 1 push button RF BF 74 RT SW917-NET Material no.: 1339314

Wireless technology (contd.)

Channel bandwidth
550 kHz

Wireless range
max. 450 m outdoors, max. 40 m indoors

Voltage supply

Voltage source
lithium battery Tadiran TLL-5902/S (replaceable), alternatively
SL-750/S

System
Li/SOCl₂

Nominal voltage
3.6 V

Nominal capacity
1.1 Ah

Battery life
depending on the switching frequency
10 s: ca. 1.5 years
1 min: ca. 7.5 years
manufacturer's specification of max. storage life

Colour plate selection for RT (included in delivery of RT)

