



Command device with 2 push buttons RF BF 74 RT/RT SW868-NET Article no.: 1433259


Product features

- Thermoplastic enclosure
- sWave.NET® wireless technology
- No wiring or cable laying required
- Configurable online via wireless interface
- Power supply by lithium battery (replaceable)
- Actuator: Push button RT
- Actuator made of plastic

Notes

- The battery is included in delivery.

Dimensions

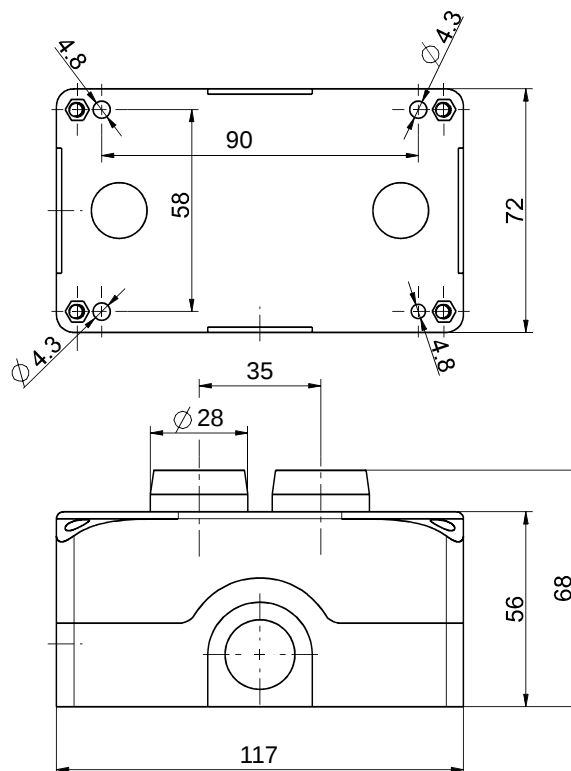

General technical data

Applied standards

EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 301 489-3, EN 300 220-2

Enclosure

polycarbonate

Tightening torque

cover screws: approx. 1.6 Nm

Degree of protection

IP65 (IEC/EN 60529)

Ambient temperature

-20 °C ... +65 °C

Telegram rate

max. 12000 telegrams with repetitions/h

Mechanical life

800 000 operations

Actuating time

min. 80 ms

Note

transmission of battery voltage and switching condition

Wireless approvals

Europe: RED 2014/53/EU

Weight

200 g



Command device with 2 push buttons RF BF 74 RT/RT SW868-NET Article no.: 1433259

Wireless technology

Frequency
868.3 MHz (Europe)

Data rate
66 kbps

Channel bandwidth
350 kHz

Modulation type
2-FSK

Protocol
sWave.NET®

Transmission power
< 25 mW

Wireless range
max. 450 m outdoors, max. 40 m indoors

Voltage supply

Voltage source
lithium battery Tadiran SL-750/S (1/2 AA), replaceable

System
Li/SOCl₂

Nominal voltage
3.6 V

Nominal capacity
1.1 Ah

Battery life
depending on the switching frequency
1 s: ca. 0.6 years
10 s: ca. 4.3 years
100 s: >10 years*
*manufacturer's specification of max. storage life

Colour plate selection for RT (included in delivery of RT)

