



Radio module RF 96 BU SW915B-NET-LDS Article no.: on request


Product features

- sWave.NET® wireless technology
- Wireless module for laser sensors series RF LDS-NET

Notes

- The battery must be ordered separately.

Dimensions

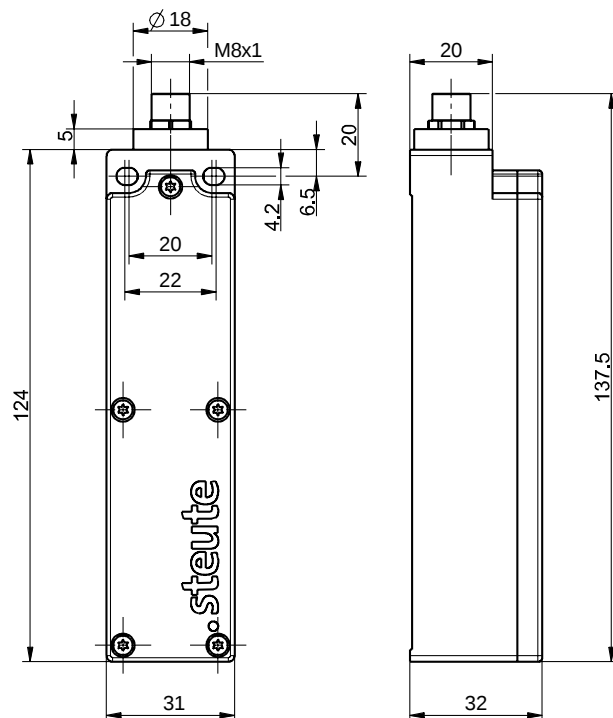

General technical data

Applied standards

EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 301 489-1, EN 301 489-3, EN 300 220-1, EN 300 220-2

Enclosure

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

Tightening torque

M4 enclosure mounting screws: max 1.2 Nm
M2.5 cover screws: approx. 0.45 Nm

Degree of protection

IP67 (IEC/EN 60529)

Sensor

logging with IR laser, suitable for external connection

Ambient temperature

0 °C ... +65 °C

Telegram rate

max. 7200 telegrams with repetitions/h

Switching frequency

adjustable, default 0.067 Hz, max. 0.5 Hz, min. 31 s
corresponds to approx. 0.032 Hz

Cycle time

adjustable, default 15 s, min. 2 s, max. 31 s

Switching distances

0 - 25 cm ... 0 - 10,000 cm, default 100 cm, adjustable in 1 cm steps

Hysteresis

one side, default 10 cm, adjustable in 1 cm steps

Standby current

with standard settings (15 s switching period):
RF LDS SPOT: 160 µA
RF LDS ZONE: 290 µA

Actuating time

min. 20 ms

Note

transmission of battery voltage and switching condition

Errors and omissions excepted.



Radio module RF 96 BU SW915B-NET-LDS Article no.: on request

Wireless technology

General

Frequency

914.2 MHz (USA, Canada)

Data rate

62.5 kbps

Channel bandwidth

500 kHz

Modulation type

CSS

Protocol

sWave.NET®

Transmission power

< 25 mW

Wireless approvals

USA: FCC - VPYLBA0QB1SJ

Canada: IC - 772C-LBAA0QB1SJ

Function

Wireless range

max. 450 m outdoors, max. 40 m indoors

Voltage supply

Voltage source

lithium battery Tadiran SL-2770 (C), replaceable

System

Li/SOCl₂

Nominal voltage

3.6 V

Nominal capacity

8.5 Ah

Battery life

Typical values with default settings.

RF LDS SPOT - switching period:

5 s: approx. 1.9 years;

10 s: approx. 3.3 years;

15 s: approx. 5.1 years;

30 s: approx. 9.7 years.

RF LDS ZONE - switching period:

5 s: approx. 1.3 years;

10 s: approx. 2.4 years;

15 s: approx. 2.9 years;

30 s: approx. 5.1 years.